


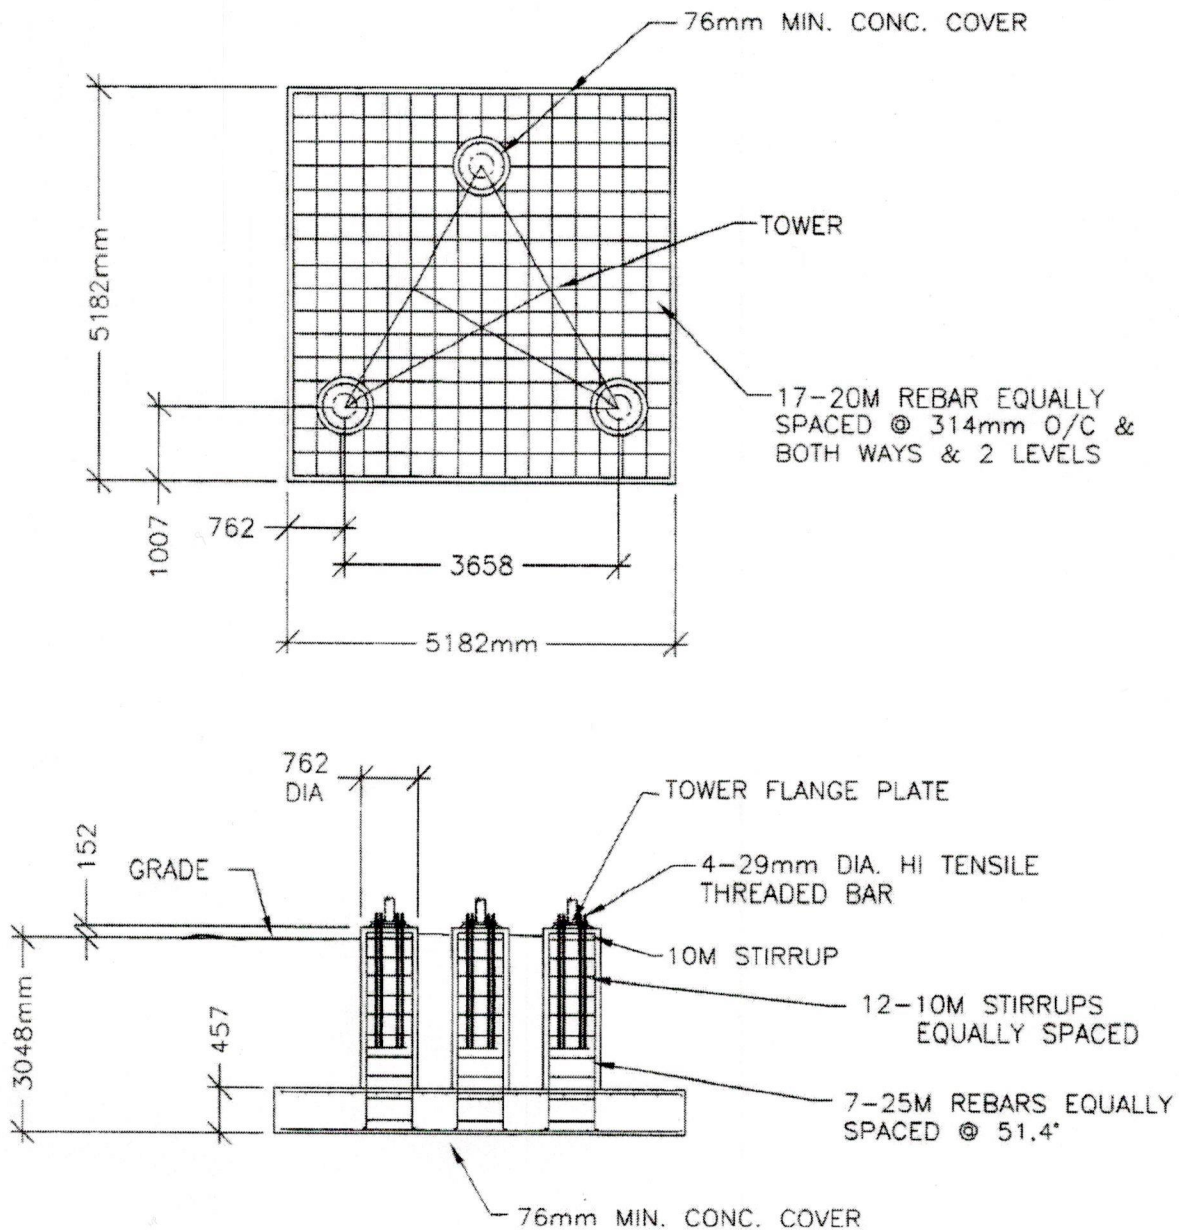

PRELIMINARY

(ALL
KNOCK DOWN)

TOWER FOUNDATION DESIGNED TO CAN/CSA-S37-13 FOR:

- NORMAL SOIL BEARING 190kPa UNLESS SOILS REPORT FINDS OTHERWISE A FOUNDATION REDESIGN MAY BE REQUIRED.
- CONCRETE STRENGTH TO 30 MPa - 28 DAYS.
- 6% ENTRAINED AIR IN BASE.
- COMPACTED BACKFILL TO 95% PDD.

Maxtower COMPANY LIMITED
5 EDMONDSON ST., P.O. BOX 277
BRANTFORD, ONTARIO N3T 5M8
FAX(519)752-4160 TEL(519)752-6501

DATE: MAR. 9, 2015

SCALE: NTS

DRAWN BY: D. STARK

CHECKED BY:

APPROVED BY:

REVISION:

BASE FOUNDATION FOR
60.96m FA200 TOWER (FA200L200)

DRAWING NUMBER: 15-020 SHEET 2 OF 2